


OVERVIEW

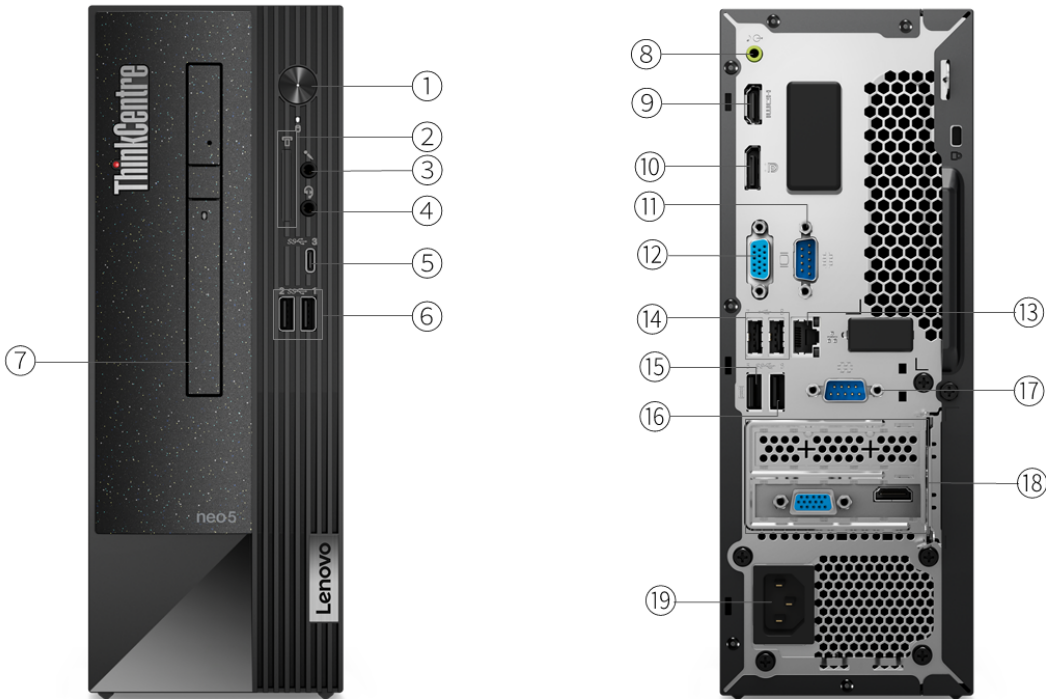

1. Power button	11. Serial *
2. Card reader *	12. VGA
3. Microphone (3.5mm)	13. Ethernet (RJ-45)
4. Headphone / microphone combo jack (3.5mm)	14. 2x USB 2.0
5. USB-C 3.2 Gen 1 (support data transfer and 5V@3A charging)	15. USB 3.2 Gen 1 (with Smart Power On feature)
6. 2x USB 3.2 Gen 1	16. USB 3.2 Gen 1
7. Optical drive *	17. Serial *
8. Line-out (3.5mm)	18. Optional ports on expansion cards *
9. HDMI	19. Power connector
10. DisplayPort 1.4	

- Notes:
- Ports with * are only available on selected models
 - Onboard video ports are only available for the models with integrated graphics

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, or 12th Generation Intel Core™ i3 / i5 / i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G6900	2	2	3.4GHz	-	4MB	DDR4-3200	Intel UHD Graphics 710
Pentium Gold G7400	2	4	3.7GHz	-	6MB	DDR4-3200	Intel UHD Graphics 710
Core i3-12100	4 (4 P-core + 0 E-core)	8	P-core 3.3GHz	P-core 4.3GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i3-12300	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.4GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-12400	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz	18MB	DDR4-3200	Intel UHD Graphics 730
Core i5-12400F	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz	18MB	DDR4-3200	-
Core i5-12500	6 (6 P-core + 0 E-core)	12	P-core 3.0GHz	P-core 4.6GHz	18MB	DDR4-3200	Intel UHD Graphics 770
Core i5-12600	6 (6 P-core + 0 E-core)	12	P-core 3.3GHz	P-core 4.8GHz	18MB	DDR4-3200	Intel UHD Graphics 770
Core i7-12700	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.6GHz	25MB	DDR4-3200	Intel UHD Graphics 770
Core i7-12700F	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.6GHz	25MB	DDR4-3200	-
Core i9-12900	16 (8 P-core + 8 E-core)	24	P-core 2.4GHz / E-core 1.8GHz	P-core 5.0GHz / E-core 3.8GHz	30MB	DDR4-3200	Intel UHD Graphics 770
Core i9-12900F	16 (8 P-core + 8 E-core)	24	P-core 2.4GHz / E-core 1.8GHz	P-core 5.0GHz / E-core 3.8GHz	30MB	DDR4-3200	-

Operating System

Operating System**

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Ubuntu Linux
- No operating system

Graphics

Graphics***[1][2]

Graphics	Type	Memory	Connector	Max Resolution	Key Features	Remark
Intel UHD graphics 710	Integrated	Shared	1x HDMI® 2.1 TMDS, 1x VGA, 1x DP 1.4	3840x2160@60Hz(HDMI), 1920x1200@60Hz(VGA), 4096x2304@60Hz(DP)	DirectX® 12	-
Intel UHD graphics 730	Integrated	Shared	1x HDMI 2.1 TMDS, 1x VGA, 1x DP 1.4	3840x2160@60Hz(HDMI), 1920x1200@60Hz(VGA), 4096x2304@60Hz(DP)	DirectX 12	-
Intel UHD	Integrated	Shared	1x HDMI 2.1	3840x2160@60Hz(HDMI),	DirectX 12	-

graphics 770			TMDs, 1x VGA, 1x DP 1.4	1920x1200@60Hz(VGA), 4096x2304@60Hz(DP)		
Intel Iris® Xe MAX 100 Graphics	Discrete	2GB LPDDR4X	1x VGA, 1x HDMI 1.4	3840x2160@30Hz(HDMI), 1920x1080@60Hz(VGA)	DirectX 12, OpenGL 4.6	Temporarily unavailable

- Notes:
- 1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)
 - 2. Onboard video ports are only available for the models with integrated graphics

Monitor Support

Monitor Support

Supports up to 3 independent displays via (HDMI, DP and VGA), more displays support via discrete graphics

Chipset

Chipset

Intel B660 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 UDIMM slots, dual-channel capable

Memory Type

DDR4-3200

- Notes:
- 1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to two drives, 1x 2.5"/3.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB
- 3.5" HDD up to 2TB
- M.2 SSD up to 1TB

Storage Type^{***}

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4	-	Opal2

RAID

No support

- Notes:
- 1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical^{**}

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)

ThinkCentre neo 50s

- None

Card Reader

- 7-in-1 card reader (SD, SDHC, SDXC, MMC, MS, MS-Pro, XD)
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

- Single speaker, 1W x1
- No speakers

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
180W	Fixed	85%	Autosensing
260W	Fixed	90%	100-240V, 50-60Hz

DESIGN

Input Device

Keyboard**

- No keyboard
- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard, black
- Lenovo Traditional Keyboard (USB connector), black

Mouse**

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- No mouse

Mechanical

Form Factor

SFF (7.4L)

Dimensions (WxDxH)

100 x 308 x 274.8 mm (3.9 x 12.1 x 10.8 inches)

Packaging Dimensions (WxDxH)

195 x 390 x 500 mm (7.67 x 15.35 x 19.69 inches)

Weight

Around 4.5 kg (9.9 lbs)

Packaging Weight

Around 6.35 kg (14.0 lbs)

Case Color

Raven black

Bays

- 1x 2.5"/3.5" disk bay
- 1x slim ODD bay

Expansion Slots

- One PCIe 3.0 x1, low-profile (length < 167.65mm, height < 68.90mm)
- One PCIe 4.0 x16, low-profile (length < 167.65mm, height < 68.90mm)
- Two M.2 slots (one for WLAN, one for SSD)

EOU

No support

Stand

- Vertical stand
- No stand

IO Box

No IO box

Mounting

None

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Realtek RTL8111HN, 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth[®]^[1]**

- Intel Wi-Fi[®] 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Realtek Wi-Fi 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- No WLAN and Bluetooth

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports^[1]

Front Ports

- 2x USB 3.2 Gen 1
- 1x USB-C[®] 3.2 Gen 1 (support data transfer and 5V@3A charging)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Optional Front Ports

1x card reader

Rear Ports^[2]

- 2x USB 2.0
- 2x USB 3.2 Gen 1 (one supports Smart Power On)
- 1x VGA
- 1x HDMI 2.1 TMDS
- 1x DisplayPort[™] 1.4
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports^{}**

- 2x USB 2.0 (via 2-port adapter)
- 1x serial
- 1x 2nd serial
- 1x parallel
- None

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt[™] 3/4: 40 Gbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable

Monitor Cable***

- HDMI to HDMI cable
- HDMI to VGA dongle
- DP 1.2 to VGA dongle
- DP 1.2 to DVI-D dongle
- DP 1.2 to HDMI 1.4 dongle
- DP 1.2 to dual DP 1.2 dongle
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified

Physical Locks

- (Optional) Smart Cable Clip
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

No fingerprint reader

BIOS Security

- Secure Wipe
- Power-on password
- Supervisor password
- Hard disk password
- Computrace support
- Cover presence switch
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY**System Management****System Management**

Non-vPro®

SERVICE**Warranty^[1]****Base Warranty****

- 1-year courier or carry-in service
- 1-year limited onsite service
- No base warranty

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL**Operating Environment**

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- (Optional) EPEAT™ Gold
- (Optional) EPEAT Silver
- (Optional) ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 9.0
- RoHS compliant

Other Certifications

Other Certifications

- (Optional) TÜV Rheinland® Low Noise
- (Optional) TÜV Rheinland Ultra Low Noise

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel




intel



intel



intel

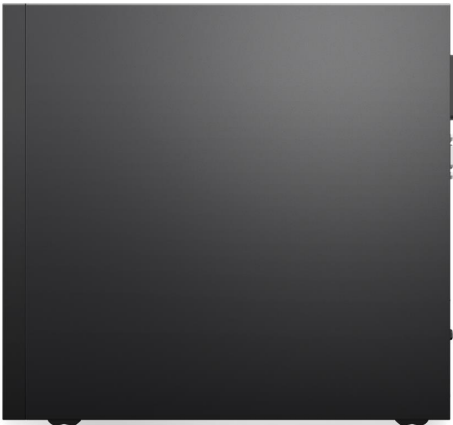

intel



intel