


OVERVIEW

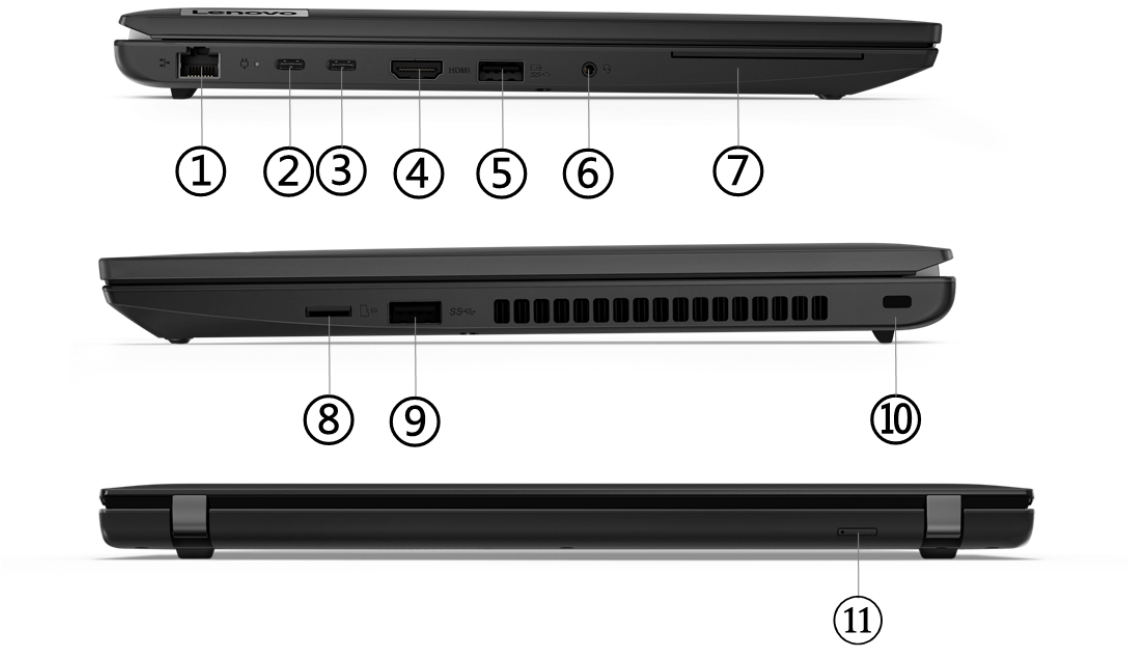

| | |
|----------------------------------------------|---------------------------------------|
| 1. Ethernet (RJ-45) | 7. Smart card reader * |
| 2. USB-C 3.2 Gen 2 | 8. microSD card reader |
| 3. USB-C 3.2 Gen 2 | 9. USB 3.2 Gen 1 |
| 4. HDMI | 10. Kensington Nano Security Slot |
| 5. USB 3.2 Gen 1 (Always On) | 11. Nano-SIM card slot (WWAN model) * |
| 6. Headphone / microphone combo jack (3.5mm) | |

- Notes:
- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 3 / 5 / 7 Processor

Processor**

| Processor Name | Cores | Threads | Base Frequency | Max Frequency | Cache | Processor Graphics |
|-----------------------|-------|---------|----------------|---------------|------------------|----------------------|
| AMD Ryzen 3 PRO 7330U | 4 | 8 | 2.3GHz | 4.3GHz | 2MB L2 / 8MB L3 | AMD Radeon™ Graphics |
| AMD Ryzen 5 PRO 7530U | 6 | 12 | 2.0GHz | 4.5GHz | 3MB L2 / 16MB L3 | AMD Radeon Graphics |
| AMD Ryzen 7 PRO 7730U | 8 | 16 | 2.0GHz | 4.5GHz | 4MB L2 / 16MB L3 | AMD Radeon Graphics |

Operating System

Operating System**^{[1][2]}

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Linux
- Ubuntu Linux
- No operating system

Notes:

- Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.
- Windows 11 DG Windows 10 Pro 64 is for special bid only

Graphics

Graphics

| Graphics | Type | Memory | TGP | Key Features |
|---------------------|------------|--------|---------------|--------------|
| AMD Radeon Graphics | Integrated | Shared | Share CPU TDP | DirectX® 12 |

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 3840x2160@60Hz
- USB-C supports up to 5120x2880@120Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-3200

Notes:

- The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

One drive, up to 2TB M.2 2242 SSD

Storage Slot

One M.2 2242 PCIe® 3.0 x4 slot

Storage Type^[2]

| Disk Type | Interface | Offering | Security |
|--------------|-------------------------|---------------------------|----------|
| M.2 2242 SSD | PCIe NVMe®, PCIe 4.0 x4 | 256GB / 512GB / 1TB / 2TB | Opal 2.0 |

- Notes:
- The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
 - The SSD with PCIe 4.0x4 is downgraded to closer to PCIe 3.0 x4 due to AMD platform limitations.

Removable Storage

Card Reader

microSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

Dual-microphone array, far-field, Dolby Voice

Camera**

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus

Battery

Battery**

- Integrated Li-Polymer 46.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W or 100W AC adapter
- Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W or 100W AC adapter
- Integrated Li-Polymer 63Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 100W AC adapter

Battery Life^[1]

Configuration 1 (max battery life)
MobileMark® 25: up to 14.12 hr with 605 performance score @250nits
JEITA 2.0: up to 20.8 hr @150nits
Local video playback: up to 17.83 hr @150nits

Alternate configuration 2
MobileMark 25: up to 10.34 hr with 513 performance score @250nits
JEITA 2.0: up to 16.01 hr @150nits
Local video playback: up to 15.78 hr @150nits

Alternate configuration 3
MobileMark 25: up to 8.42 hr with 507 performance score @250nits
JEITA 2.0: up to 13.03 hr @150nits
Local video playback: up to 12.88 hr @150nits

- Notes:
- Configuration 1 (max battery life): HD (non-touch), AMD Ryzen 7 PRO 7730U, 8GB DDR4, Win 11, 63Wh battery, best power efficiency power mode
Alternate configuration 2: FHD (touch), AMD Ryzen 5 PRO 7530U, 16GB DDR4, Win 11, 57Wh battery, best power efficiency power mode
Alternate configuration 3: FHD (touch), AMD Ryzen 5 PRO 7530U, 16GB DDR4, Win 11, 46.5Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.
The maximum capacity of the battery will decrease with time, ambient temperature and use.
Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

Power Adapter

Power Adapter**[1]

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 100W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:
1. AC adapter offerings depend on the country.

DESIGN

Display

Display**[1]

| Size | Resolution | Touch | Type | Brightness | Surface | Aspect Ratio | Contrast Ratio | Color Gamut | Viewing Angle (L/R/U/D) | Key Features |
|------|-----------------|-------------|------|------------|------------|--------------|----------------|-------------|-------------------------|--------------|
| 14" | HD (1366x768) | None | TN | 220 nits | Anti-glare | 16:9 | 500:1 | 45% NTSC | 45°/45°/15°/35° | - |
| 14" | FHD (1920x1080) | None | IPS | 250 nits | Anti-glare | 16:9 | 800:1 | 45% NTSC | 85°/85°/85°/85° | - |
| 14" | FHD (1920x1080) | None | IPS | 400 nits | Anti-glare | 16:9 | 1500:1 | 72% NTSC | 85°/85°/85°/85° | Low power |
| 14" | FHD (1920x1080) | Multi-touch | IPS | 300 nits | Anti-glare | 16:9 | 1000:1 | 45% NTSC | 85°/85°/85°/85° | - |

Touchscreen

- Capacitive-type on-cell multi-touch, supports 10-point touch
- Non-touch

Notes:
1. California Electronic Waste Recycling Fee
In California USA, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, please go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad, 56 x 115 mm (2.24 x 4.53 inches)

Mechanical

Dimensions (WxDxH)[1]

| Models | Dimensions |
|-----------------------------------------|-----------------------------------------------------|
| Aluminium (top), PC-CF (bottom) models | 325.4 x 217 x 18.73 mm (12.81 x 8.54 x 0.74 inches) |
| Aluminium (top), PC-ABS (bottom) models | 325.4 x 217 x 18.93 mm (12.81 x 8.54 x 0.75 inches) |
| PC-ABS (top), PC-CF (bottom) models | 325.4 x 217 x 19.63 mm (12.81 x 8.54 x 0.77 inches) |

| | |
|--------------------------------------|-----------------------------------------------------|
| PC-ABS (top), PC-ABS (bottom) models | 325.4 x 217 x 19.83 mm (12.81 x 8.54 x 0.78 inches) |
|--------------------------------------|-----------------------------------------------------|

Weight^[2]
Starting at 1.4 kg (3.09 lbs)
Case Color

Thunder black
Case Material^{**}

- Aluminium (top), PC-CF (bottom)
- Aluminium (top), PC-ABS (bottom)
- PC-ABS (top), PC-CF (bottom)
- PC-ABS (top), PC-ABS (bottom)

Notes:

- The system dimensions may vary depending on configurations.
- The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet
Gigabit Ethernet, Realtek RTL8111EPV, 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth^{[1][2]}

- AMD Wi-Fi® 6E RZ616, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- No WLAN and Bluetooth

WWAN^{**}

- Wireless WAN upgradable to 4G (with antenna ready)
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card
- Quectel EM05-G, 4G LTE CAT4, M.2 card
- No support

SIM Card
No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

- Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.
- 6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
Wi-Fi 6E is only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI, up to 4K/60Hz
- 1x microSD card reader
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports^{***}

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

- The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
USB4 40Gbps (USB 40Gbps): 40 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad® L14 Gen 4 \(AMD\)](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

- Camera privacy shutter
- (Optional) IR camera for Windows Hello

MANAGEABILITY

System Management

System Management

DASH

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Sustainability

Material

30% PCC recycled plastic used in top cover frame material
30% PCC recycled plastic used in bottom cover material
50% PCC recycled plastic used in speaker enclosure
90% PCC recycled plastic used in the battery pack
90% PCC recycled plastic used in standard adapter
45% PCC recycled plastic used in SIM tray
Low-temperature solder
90% recycled and/or sustainable packaging

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- EPEAT™ Gold Registered
- ENERGY STAR® 8.0
- ErP Lot 6
- ErP Lot 26
- TCO Certified 9.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.

responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD