


OVERVIEW

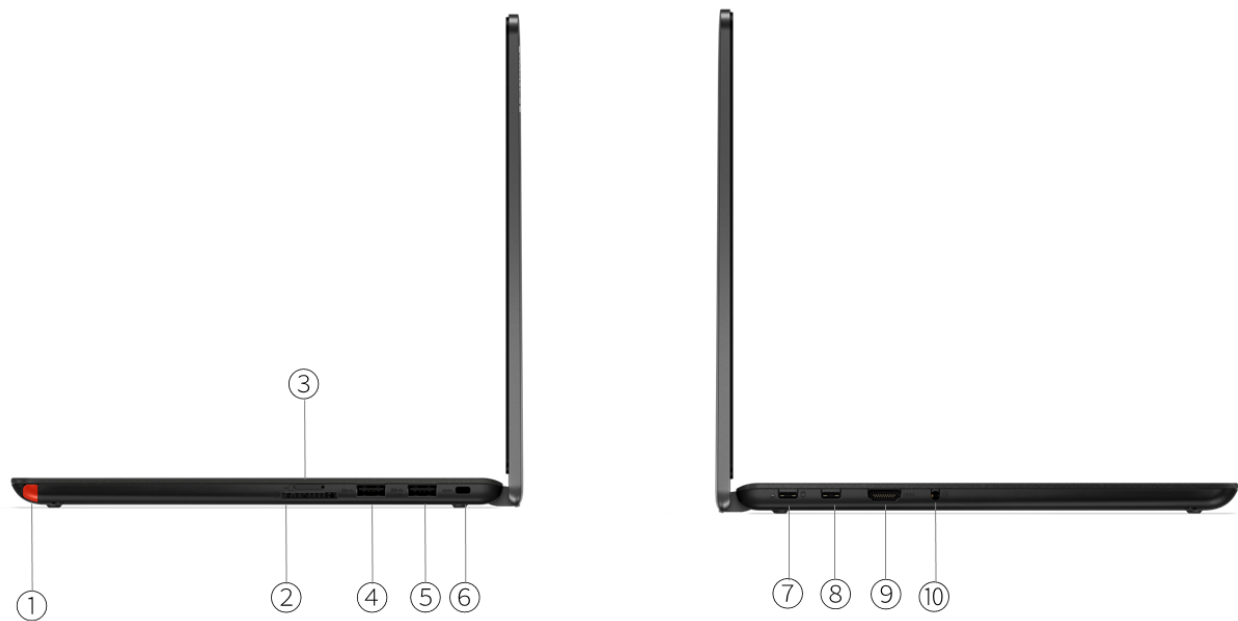

1. Pen slot	6. Kensington Security Slot
2. Card reader	7. USB-C 3.2 Gen 1
3. Nano-SIM card slot (WWAN model)	8. USB-C 3.2 Gen 1
4. USB 3.2 Gen 1	9. HDMI
5. USB 3.2 Gen 1 (Always On)	10. Combo audio jack

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 3 / 5 / 7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD Ryzen 3 7330U	4	8	2.3GHz	4.3GHz	2MB L2 / 8MB L3	AMD Radeon™ Graphics
AMD Ryzen 5 7530U	6	12	2.0GHz	4.5GHz	3MB L2 / 16MB L3	AMD Radeon Graphics
AMD Ryzen 7 7730U	8	16	2.0GHz	4.5GHz	4MB L2 / 16MB L3	AMD Radeon Graphics

Operating System

Operating System**^[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 DG Windows 10 Pro 64

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics

Graphics	Type	Memory	TGP	Key Features
AMD Radeon Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4k@30Hz
- USB-C supports up to 5k@30Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

- Up to 12GB (4GB soldered + 8GB SO-DIMM) DDR4-3200 offering
- Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

Memory Type

DDR4-3200

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

One drive, up to 512GB M.2 2242 SSD

Storage Slot

One M.2 2242 PCIe® 3.0 x4 slot

Storage Type**[2]

Disk Type	Interface	Offering	Security
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	128GB	-
M.2 2242 SSD	PCIe NVMe, PCIe 4.0 x4	256GB / 512GB	Opal 2.0

Notes:

- 1 . The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
- 2 . M.2 PCIe Gen 4 SSD in the M.2 PCIe Gen 3 slot is downgraded to PCIe Gen 3 performance.

Removable Storage

Card Reader

4-in-1 card reader (SD, SDHC, SDXC, MMC)

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, optimized with Dolby® Audio™

Microphone**

- Dual-microphone array
- Dual-microphone array + single microphone

Camera**

- FHD 1080p + IR, with privacy shutter, fixed focus; rear 5.0-megapixel, autofocus
- FHD 1080p + IR, with privacy shutte, fixed focus
- Front FHD 1080p, with privacy shutter, fixed focus
- Front FHD 1080p, with privacy shutter, fixed focus; rear 5.0-megapixel, autofocus

Sensor

Sensors

- Accelerometer (G) sensor
- Hall sensor
- Proximity (P) sensor (WWAN models)

Battery

Battery

Integrated Li-Polymer 51Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

Max Battery Life[1]

- Models with AMD Ryzen 3 7330U:
MobileMark® 2018@200nits: 11.12 hr
Local video (1080p) playback@150nits: 14.8 hr
- Models with AMD Ryzen 5 7530U:
MobileMark 2018@200nits: 11.32 hr
Local video (1080p) playback@150nits: 14.83 hr
- Models with AMD Ryzen 7 7730U:
MobileMark 2018@200nits: 10.8 hr
Local video (1080p) playback@150nits: 13.7 hr

Notes:

- 1 . All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, MobileMark 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter

- **^[1]
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
 - 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

1 . AC adapter offerings depend on the country.

DESIGN

Display

Display^{[1][2]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
13.3"	WUXGA (1920x1200)	Multi-touch	IPS	300 nits	Glossy, anti-fingerprint	16:10	800:1	45% NTSC	85°/85°/85°/85°	Corning® Gorilla® Glass

Touchscreen

OGM (One Glass Metal mesh) multi-touch, supports 10-point touch

- Notes:
- 1 . California Electronic Waste Recycling Fee In California USA, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, please go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
- 2 . IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Multi-mode

Multi-mode

Laptop, tent, stand, and tablet modes supported by 360° hinge

Input Device

- Pen**
- Lenovo Integrated Pen, on-board garaged, rechargeable, supports AES protocol
 - No pen (purchase separately)

Keyboard

6-row, spill-resistant, multimedia Fn keys

- Keyboard Backlight**
- LED backlight
 - Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 60.5 x 104 mm (2.38 x 4.09 inches)

Mechanical

Dimensions (WxDxH)^[1]

305 x 216.8 x 17.6 mm (12.01 x 8.54 x 0.69 inches)

Weight^[2]

Around 1.517 kg (3.34 lbs)

Case Color

Thunder black

Surface Treatment

Aluminium stamping (anodized)

Case Material

Aluminium (top), PC-ABS (bottom)

Others

Buttons: power key

Notes:

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Ethernet

No onboard Ethernet

WLAN + Bluetooth^[1]

Realtek Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card

WWAN

- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card, with embedded eSIM functionality
- No support

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x Card reader
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports

1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed. USB 2.0: 480 Mbit/s; USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s; USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s; USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s; USB4 40Gbps (USB 40Gbps): 40 Gbit/s; Thunderbolt™ 3/4: 40 Gbit/s

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® NanoSaver® lock Slot

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Administrator password
- Power-on password
- Hard disk password

Other Security

Camera privacy shutter

SERVICE

Warranty^[1]

Base Warranty**

- 1-year courier or carry-in service
- 1-year mail-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Sustainability

Material

97% PIC Recycled Plastic used in Cushion
90% PCC recycled plastic used in 65W (3-pin) adapter
Recycled aluminum keyboard bracket
Ocean bound plastic touchpad Mylar

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- EPEAT™ Gold Registered
- ENERGY STAR® 8.0
- ErP Lot 6
- TCO Certified 9.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD




AMD



AMD



AMD

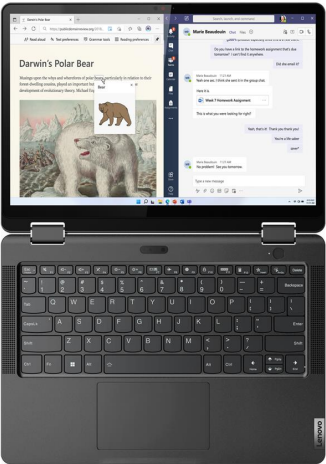

AMD