
OVERVIEW

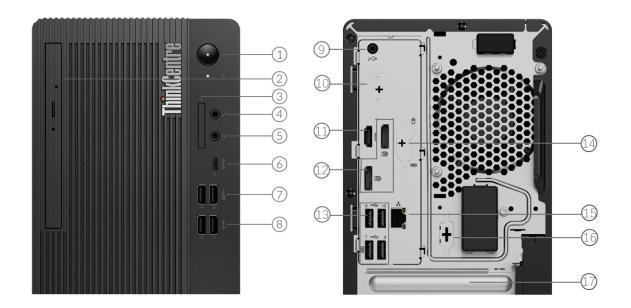

1. Power button	10. Flex IO *		
2. Optical drive *	11. HDMI 2.1 TMDS		
3. Card reader *	12. 2x DisplayPort 1.4		
4. Microphone (3.5mm)	13. 4x USB 2.0		
5. Headphone / microphone combo jack (3.5mm)	14. 2x PS/2 ports (keyboard / mouse) *		
6. USB-C 3.2 Gen 1	15. Ethernet (RJ-45)		
7. 2x USB 3.2 Gen 1	16. Serial *		
8. 2x USB 3.2 Gen 2	17. Optional ports on expansion cards *		
9. Line-out (3.5mm)			

Notes:

- Items with * are only available on selected models
- More ports are available through the optional expansion cards (not shown on the sample product above)

ThinkCentre M70t Gen 4

PERFORMANCE

Processor

Processor Family

13th Generation Intel[®] Core™ i3 / i5 / i7 Processor

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
Core i3-13100	4 (4 P-core + 0 E-core)	8	P-core 3.4GHz	P-core 4.5GHz	12MB	Intel UHD Graphics 730
Core i5- 13400	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E- core 1.8GHz	P-core 4.6GHz / E-core 3.3GHz	20MB	Intel UHD Graphics 730
Core i5- 13400F ^[2]	10 (6 P-core + 4 E-core)	16	P-core 2.5GHz / E- core 1.8GHz	P-core 4.6GHz / E-core 3.3GHz	20MB	-
Core i5- 13500	14 (6 P-core + 8 E-core)	20	P-core 2.5GHz / E- core 1.8GHz	P-core 4.8GHz / E-core 3.5GHz	24MB	Intel UHD Graphics 770
Core i5- 13600	14 (6 P-core + 8 E-core)	20	P-core 2.7GHz / E- core 2.0GHz	P-core 5.0GHz / E-core 3.7GHz	24MB	Intel UHD Graphics 770
Core i7- 13700	16 (8 P-core + 8 E-core)	24	P-core 2.1GHz / E- core 1.5GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 4.1GHz	30MB	Intel UHD Graphics 770
Core i7- 13700F ^[3]	16 (8 P-core + 8 E-core)	24	P-core 2.1GHz / E- core 1.5GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 4.1GHz	30MB	-

Notes:

[1] Intel Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see http://www.intel.com/technology/turboboost/ for more information.
 [2], [3] Special bid only.

Operating System

Operating System**

- Ubuntu Linux^[1]
- Windows[®] 10 IoT Enterprise LTSC 2021^[2]
- Windows 11 DG Windows 10 Pro 64
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 Pro
- No operating system

Notes:

[1] Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, Human Presence Detection, etc.

[2] Special bid only.

Graphics

Graphics***[1]

Graphics	Туре	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 730	Integrated	Shared	2x DP 1.4 HBR2, 1x HDMI® 2.1 TMDS, 1x Flex IO (VGA / DP 1.2 / HDMI 2.1 TMDS / USB- C®)	4096x2304@60Hz(DP), 4096x2160@60Hz[HDMI / Flex IO(HD MI) / Flex IO(DP)], 3840x2160@60Hz[Flex IO(USB-C)], 2048x1536@50Hz[Flex IO(VGA)]	DirectX® 12
Intel UHD graphics 770	Integrated	Shared	2x DP 1.4 HBR2, 1x HDMI 2.1 TMDS, 1x Flex IO (VGA / DP 1.2 /	4096x2304@60Hz(DP), 4096x2160@60Hz[HDMI / Flex IO(HD MI) / Flex IO(DP)], 3840x2160@60Hz[Flex IO(USB-C)],	DirectX 12

Lenovo

			HDMI 2.1 TMDS / USB- C)	2048x1536@50Hz[Flex IO(VGA)]	
AMD Radeon™ RX 6400	Discrete	4GB GDDR6	1x HDMI 2.1 FRL, 1x DP 1.4a	7680x4320@60Hz(HDMI), 7680x4320@60Hz(DP)	DirectX 12, OpenGL 4.6
NVIDIA® GeForce RTX™ 3050	Discrete	8GB GDDR6	1x HDMI 2.1 FRL, 3x DP 1.4a	7680x4320@60Hz(HDMI), 7680x4320@120Hz(DP)	DirectX 12, OpenGL 4.6

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

Monitor Support

Monitor Support^[1]

Supports up to 4 independent displays via onboard ports (2x DP, 1x HDMI, and 1x optional Flex IO), more displays support via discrete graphics

Notes:

[1] Onboard video ports are only available for the models with integrated graphics.

Chipset

Chipset

Intel Q670 chipset

Memory

Max Memory^[1]

Up to 128GB DDR4-3200

Memory Slots

Four DDR4 DIMM slots, dual-channel capable

Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo[®] memory offerings.

Storage

Storage Support^{[1][2]}

Up to three drives, 1x 2.5"/3.5" HDD + 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB each
- 3.5" HDD up to 2TB
- M.2 SSD up to 2TB

Storage Type***

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe 4.0 x4 Performance	-	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Value	-	Opal 2.0

RAID

RAID 0/1 support for HDDs (RAID preset only available via special bid models)

Notes:

[1] The max capacity of each disk type is based on the test results with current Lenovo storage offerings.

[2] 2TB SSD is special bid only.

Removable Storage

Optical**

- DVD-ROM, SATA connector, slim (9.0mm)
- DVD burner (DVD±RW), SATA connector, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC897Q-CG codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply**

Power	Туре	Efficiency	Key Features
180W	Fixed	85%	100-240V, 50-60Hz
260W	Fixed	90%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz
380W	Fixed	92%	100-240V, 50-60Hz

DESIGN

Input Device

Keyboard**

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard, black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse**

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- No mouse

Mechanical

Form Factor

Tower (13.6L)

Dimensions (WxDxH)^[1]

145 x 296 x 346 mm (5.7 x 11.7 x 13.6 inches)

Packaging Dimensions (WxDxH)

245 x 395 x 530 mm (9.65 x 15.55 x 20.87 inches)

Weight^[2]

Around 5.9 kg (13.0 lbs)

Packaging Weight

8.3 kg (18.29 lbs)

Case Color

Black

Bays

- 1x 2.5" disk bay^[3]
- 1x 3.5" disk bay^[4]

Lenovo

• 1x slim ODD bay

Expansion Slots

- One PCIe 4.0 x16, full-height, length \leq 209mm, height \leq 117.5mm
- Two PCIe 3.0 x1, full-height, (length \leq 185mm, height \leq 100mm) or (length \leq 118mm, height \leq 110mm)
- Two M.2 slots (one for WLAN, one for SSD)

EOU

Toolless cover, disk, optical, extension card assembly / removal

Others

- (Optional) Dust filter
- (Optional) Smart Cable (USB-A to USB-C)
- Supports Smart Power On

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

- [3] 2.5" HDD tray is optional, or comes with 2.5 HDD.
- [4] 3.5" bay supports 2.5" / 3.5" HDD, 3.5" to 2.5 converter comes with 2nd 2.5" HDD.

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

- 2.5 Gigabit Ethernet, Realtek RTL8125BGS, 1x RJ-45, PCIe x1
- No optional Ethernet

WLAN + Bluetooth®**

- Realtek Wi-Fi[®] 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card^[1]
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card^[2]
- Intel Wi-Fi 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, Intel vPro® technology support, M.2 Card^[3]
- No WLAN and Bluetooth

Notes:

[1], [2], [3] Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Ports^{III}

Front Ports

- 1x USB-C 3.2 Gen 1 (15W charging)
- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Optional Front Ports

1x card reader

Rear Ports^[2]

- 4x USB 2.0
- 1x HDMI 2.1 TMDS
- 2x DisplayPort[™] 1.4
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports***

- 1x USB-C 3.2 Gen 1 with DisplayPort function and 5V@3A charging (Flex IO)
- 1x HDMI 2.1 TMDS (Flex IO)
- 1x DP 1.2 (Flex IO)

ThinkCentre M70t Gen 4

- 1x VGA (Flex IO)
- 2x USB 3.2 Gen 1 (via 2-port USB expansion card, PCIe x1)
- 1x parallel
- 1x serial
- 1x 2nd serial
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 2x PS/2

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see graphics section.

Monitor Cable

Monitor Cable***

- HDMI to HDMI cable (1.5m)
- HDMI to VGA dongle
- DP to VGA dongle
- DP to DVI-D dongle
- DP to HDMI dongle
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington[®] Security Slot[™], 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

No fingerprint reader

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Self-healing BIOS (Level 2)
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management

Lenovo

- Intel vPro Enterprise^[1]
- Non-vPro

Notes:

[1] Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty^{III}

Base Warranty**

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <u>https://smartfind.lenovo.com/</u>. To learn more details of warranty policy, please access <u>https://pcsupport.lenovo.com/warranty</u>.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications^{III}

Green Certifications

- (Optional) ENERGY STAR[®] 8.0
- (Optional) EPEAT[™] Gold Registered^[2]
- (Optional) EPEAT Silver Registered^[3]
- ErP Lot 3
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or selfdeclaration.

[2], [3] EPEAT is registered where applicable, please see https://www.epeat.net for registration status by country.

Other Certifications

Other Certifications

- (Optional) TÜV Rheinland® Low Noise
- (Optional) TÜV Rheinland Ultra Low Noise

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation, Contamination by Fluids, Salt Fog)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not
 responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS,"
 WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES
 OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow
 disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to
 you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



PSREF Product Specifications Reference



intel.



intel



intel



intel.



intel.